



Designed exclusively for indoor use, COCAMAT uses the same aluminium extrusion as our other manufactured mats but with coir inserts which are available in both the honey brown colour and dyed black. In addition to the standard aluminium finish, anodised options are available in Clear, Precious Gold, Antique Bronze or Midnight Black to compliment your entranceway colour scheme.



SYSTEM APPLICATIONS

Suitable for Interior Entrances

Highly Recommended for:

- Residential Houses
- Apartment Buildings
- Commercial Buildings
- Office & Corporate Buildings
- Shops, Restaurants & Cafés
- Civic Buildings
- Schools & Educational

Recommended For:

- Car Parks
- Warehouses
- Factories
- Sports & Big Event Venues
- Hospitals & Healthcare Facilities
- Storage Facilities

Not Recommended For:

- Public Transport Facilities



COCAMAT

Australian Made - Owned - Manufactured



TECHNICAL SPECIFICATION

GENERAL

- 10-Year warranty
- Slip tested to Australian standards
- Fire tested to Australian standards
- VOC tested
- Adhesive free
- Coir is an eco-friendly and sustainable matting material.
- Manufactured in Australia from natural coir matting sourced from our supplier in Sri Lanka
- End-of-life return to manufacturer option

INSERTS

- 50mm treads
- Rebated inserts
- Insert replacement option
- Natural honey brown or dyed black coir
- Coir fibres are moulded with a high-quality backing


EXTRUSIONS

- 6000-Series aluminium
- 50mm non-slip, furrowed treads
- Closed construction
- 10mm or 16mm depth options
- Finishing options:
 - Mill finish
 - Clear/natural anodised (15-micron)
 - Antique bronze anodised (15-micron)
 - Midnight black anodised (15-micron)
 - Precious gold anodised (15-micron)

STANDARD INSERT COLOURS



NATURAL HONEY



DYED BLACK

Note: Coir floor coverings are not produced in robotic factories. They are the products of agriculture, using natural dyes. Minor irregularities in weave are inherent to these products – they do not affect wear. They are not flaws. Variations in colour are also common – from roll to roll, from sample to roll and even within roll.



Closed Construction



LEARN MORE




REQUEST A QUOTE



REQUEST A SAMPLE

COCAMAT PROFILE DIAGRAM

10mm Closed Construction - Standard Installation

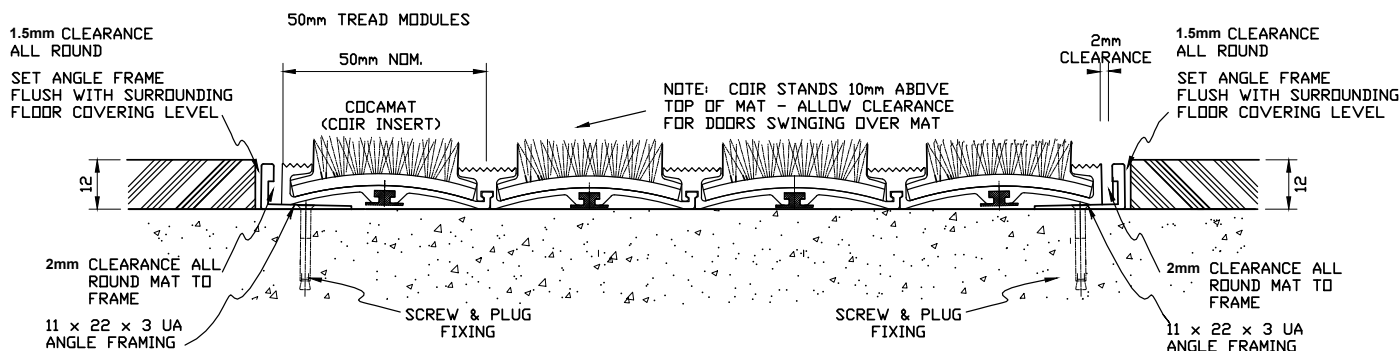

Please visit our website to access the profile diagram for:

- COCAMAT 16mm Closed Construction

SYSTEM INSTALLATION

Birrus Installation Service is available – contact us for details.

Birrus Matting Systems require an internal recess depth of 12mm (10mm mat) or 20mm (16mm mat).

Standard Birrus matwell frames are fabricated using aluminium alloy, brass or stainless-steel angle for compatibility with our mats.

Place an angle in the recess and set angles level with adjoining floor surfaces. Glue in or screw fix as required. Contractors are advised to ensure proper performance of the entire assembly, it is absolutely necessary that the base of the matwell is formed to a level plane, using an engineered screed. We do not recommend sand and cement screed as it will break up over time.

A stepped profile (surface-mounted ramped), requires a minimum of 10mm clearance if a door is to pass over the mat.

CARE & MAINTENANCE

Coir inserts should be vacuumed regularly to remove dirt, grit and loose fibres that collect in treads.

Please contact us to purchase replacement inserts.

Restore lustre to ribbed aluminium sections by lightly rubbing over them with abrasive wool.