



Wider 75mm treads and a choice of anodised finishes give a luxury aesthetic to your building entrance. With a range of 11 standard carpet colours, ULTRAMAT 75 can provide the look you want to complement your building's interior design. In addition, the insert options are GreenTag-certified to meet your sustainability requirements.

All entrance matting from Birrus can be customised to fit any shape and size.



## SYSTEM APPLICATIONS

Interior and Covered/Partially Covered Exterior.

Highly Recommended for:

- Apartment Buildings
- Commercial Buildings
- Office & Corporate Buildings
- Shops, Restaurants & Cafés
- Civic Buildings
- Public Transport Facilities
- Hospitals & Healthcare Facilities
- Storage Facilities
- Sports & Big Event Venues
- Schools & Educational
- Warehouses
- Factories

Recommended For:

- Residential Houses
- Car Parks



# ULTRAMAT 75

Luxury - Quality - Reputation



## TECHNICAL SPECIFICATION

### GENERAL

- 10-Year warranty
- Slip tested to Australian standards
- Fire tested to Australian standards
- VOC tested
- Adhesive free
- End-of-life return to manufacturer option
- Global GreenTag certified - Level A

### INSERTS

- Wider 75mm treads
- Rebated inserts
- Insert replacement option
  - Loop pile insert specification:
    - 4 standard colour options
    - Insert material: loop pile carpet
    - Yarn: type 6 nylon
    - Pile weight: 814g/m<sup>2</sup>
    - Machine gauge: 1/12th gauge
    - Colour system: 100% solution-dyed nylon
    - Pile height: 4mm (+/- 0.5mm)
    - Total thickness: 7.5mm (+/- 0.5mm)
    - Backing: Glasbac (R), Glasbac (R) RE
  - Cut pile insert specification:
    - 7 standard colour options
    - Insert material: cut pile carpet
    - Yarn: yarn-dyed nylon
    - Pile weight: 1000g/m<sup>2</sup>
    - Machine gauge: 1/10th gauge
    - Total thickness: 9.0mm


### EXTRUSIONS

- 6000-series aluminium
- 75mm non-slip, furrowed treads
- Closed construction
- 10mm
- Finishing options:
  - Mill finish (silver)
  - Clear/natural anodised (15-micron)
  - Antique bronze anodised (15-micron)
  - Precious gold anodised (15-micron)
  - Midnight black anodised (25-micron)


[www.birrusmatting.com.au](http://www.birrusmatting.com.au)

## STANDARD INSERT COLOURS

Custom colours available by special order




JET BLACK  
Cut Pile




LATTE  
Cut Pile




SLATE  
Cut Pile




CLARET  
Cut Pile




ASH  
Cut Pile




BROWNSTONE  
Cut Pile



CHOCOLATE  
Cut Pile




ASPHALT  
Loop Pile



COAL  
Loop Pile



CHARCOAL  
Loop Pile



DUSK  
Loop Pile




ULTRAMAT 75 - Jet Black Insert with  
Midnight Black Anodised Extrusions



## ULTRAMAT 75 PROFILE DIAGRAM

10mm Closed Construction - Standard Installation

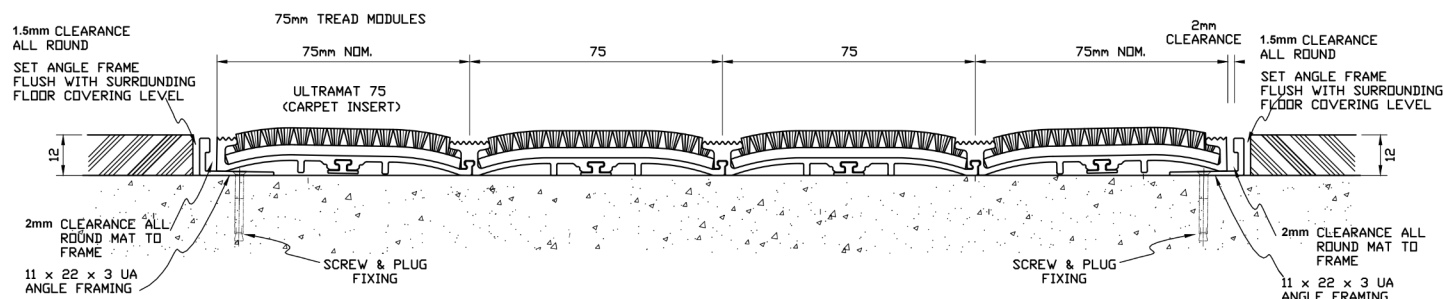

LEARN  
MORE



REQUEST  
A QUOTE



REQUEST  
A SAMPLE



SUSTAINABLE  
SYSTEMS



## SYSTEM INSTALLATION

Birrus Installation Service is available – contact us for details.

Birrus Matting Systems require an internal recess depth of 12mm (10mm mat).

Standard Birrus matwell frames are fabricated using aluminium alloy, brass or stainless-steel angle for compatibility with our mats.

Place an angle in the recess and set angles level with adjoining floor surfaces. Glue in or screw fix as required. Contractors are advised to ensure proper performance of the entire assembly, it is absolutely necessary that the base of the matwell is formed to a level plane, using an engineered screed. We do not recommend sand and cement screed as it will break up over time.

A stepped profile (surface-mounted ramped), requires a minimum of 10mm clearance if a door is to pass over the mat.



## CARE & MAINTENANCE

Vacuum clean matting regularly and, if required, spot clean carpet inserts with dry shampoo or steam clean as required.

Please contact us to purchase replacement inserts.

Restore lustre to ribbed aluminium sections by lightly rubbing over them with abrasive wool.