



ULTRAMAT 75

Luxury - Quality - Reputation

Wider 75mm treads and a choice of anodised finishes give a luxury aesthetic to your building entrance. With a range of 11 standard carpet colours, ULTRAMAT 75 can provide the look you want to complement your building's interior design. In addition, the insert options are GreenTag-certified to meet your sustainability requirements.

All entrance matting from Birrus can be customised to fit any shape and size.



TECHNICAL SPECIFICATION

GENERAL

- 10-Year warranty
- Slip tested to Australian standards
- Fire tested to Australian standards
- VOC tested
- Adhesive free
- End-of-life return to manufacturer option
- Global GreenTag certified - Level A

INSERTS

- Wider 75mm treads
- Rebated inserts
- Insert replacement option
 - Loop pile insert specification:
 - 4 standard colour options
 - Insert material: loop pile carpet
 - Yarn: type 6 nylon
 - Pile weight: 814g/m²
 - Machine gauge: 1/12th gauge
 - Colour system: 100% solution-dyed nylon
 - Pile height: 4mm (+/- 0.5mm)
 - Total thickness: 7.5mm (+/- 0.5mm)
 - Backing: Glasbac (R), Glasbac (R) RE
 - Cut pile insert specification:
 - 7 standard colour options
 - Insert material: cut pile carpet
 - Yarn: yarn-dyed nylon
 - Pile weight: 1000g/m²
 - Machine gauge: 1/10th gauge
 - Total thickness: 9.0mm

EXTRUSIONS

- 6000-series aluminium
- 75mm non-slip, furrowed treads
- Closed construction
- 10mm
- Finishing options:
 - Mill finish (silver)
 - Clear/natural anodised (15-micron)
 - Antique bronze anodised (15-micron)
 - Precious gold anodised (15-micron)
 - Midnight black anodised (25-micron)



SYSTEM APPLICATIONS

Interior and Covered/Partially Covered Exterior.


Highly Recommended for:

- Apartment Buildings
- Commercial Buildings
- Office & Corporate Buildings
- Shops, Restaurants & Cafés
- Civic Buildings
- Public Transport Facilities
- Hospitals & Healthcare Facilities
- Storage Facilities
- Sports & Big Event Venues
- Schools & Educational
- Warehouses
- Factories
- Car Showrooms
- Airports




STANDARD INSERT COLOURS

Custom colours available by special order




JET BLACK
Cut Pile




LATTE
Cut Pile




SLATE
Cut Pile




CLARET
Cut Pile




ASH
Cut Pile




BROWNSTONE
Cut Pile



CHOCOLATE
Cut Pile




ASPHALT
Loop Pile



COAL
Loop Pile



CHARCOAL
Loop Pile



DUSK
Loop Pile




ULTRAMAT 75 - Jet Black Insert with
Midnight Black Anodised Extrusions



ULTRAMAT 75 PROFILE DIAGRAM

10mm Closed Construction - Standard Installation

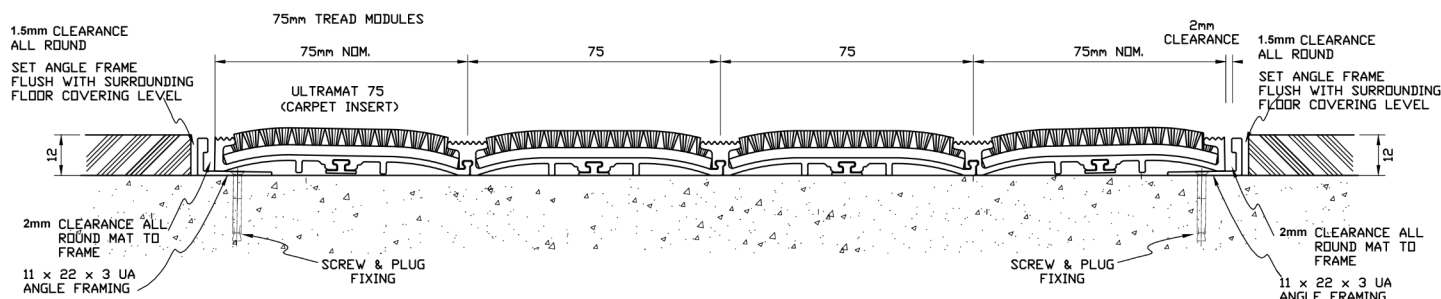

LEARN
MORE



REQUEST
A QUOTE



REQUEST
A SAMPLE



SUSTAINABLE
SYSTEMS



SYSTEM INSTALLATION

Birrus Installation Service is available – contact us for details.

Birrus Matting Systems require an internal recess depth of 12mm (10mm mat).

Standard Birrus matwell frames are fabricated using aluminium alloy, brass or stainless-steel angle for compatibility with our mats.

Place an angle in the recess and set angles level with adjoining floor surfaces. Glue in or screw fix as required. Contractors are advised to ensure proper performance of the entire assembly, it is absolutely necessary that the base of the matwell is formed to a level plane, using an engineered screed. We do not recommend sand and cement screed as it will break up over time.

A stepped profile (surface-mounted ramped), requires a minimum of 10mm clearance if a door is to pass over the mat.



CARE & MAINTENANCE

Vacuum clean matting regularly and, if required, spot clean carpet inserts with dry shampoo or steam clean as required.

Please contact us to purchase replacement inserts.