


EARTHSTONE
Shaped by the Elements
Inspired by Stone.
Designed for Beautiful Spaces.




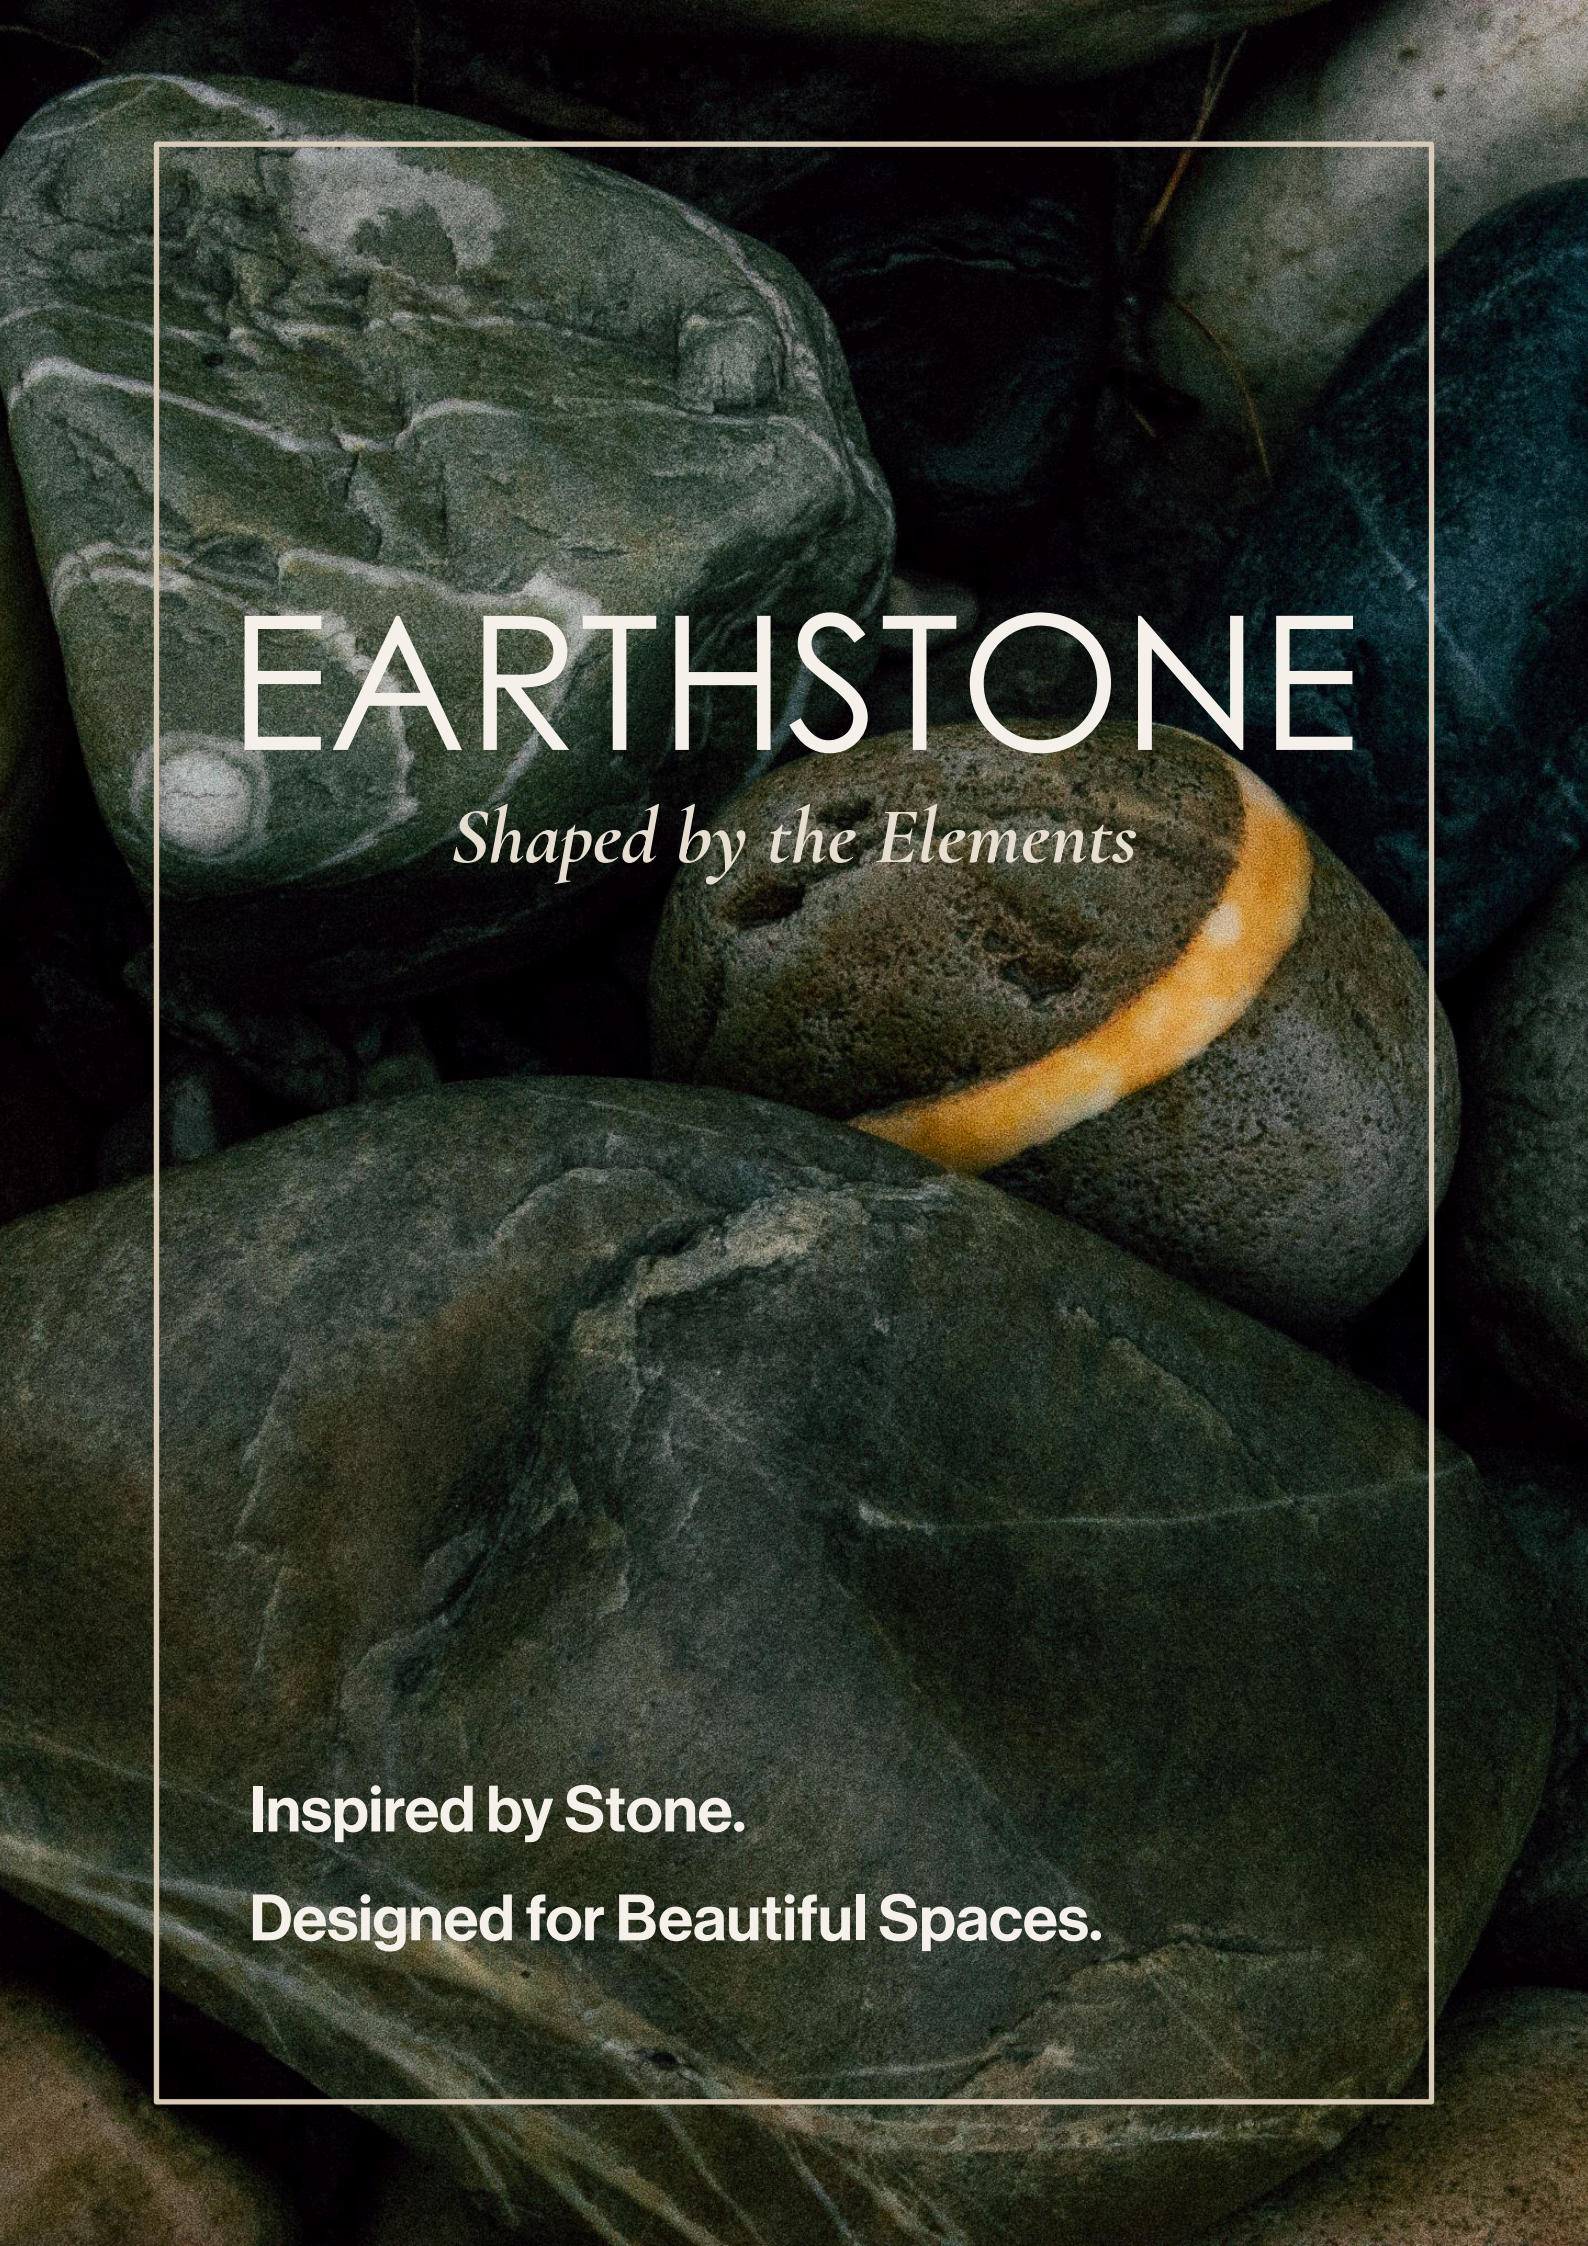


DEEP TIDE



SEA MIST



SALT AIR



COASTAL DUNE

Some spaces are designed to make us slow down, to breathe a little deeper, to feel connected, to leave the outside world behind. Earthstone Matting has been created with exactly this philosophy in mind. Rather than dominating an entrance, it quietly complements it, creating a seamless transition between the natural environment and the built space.


Inspired by Nature. Designed for Performance.

- Beautifully irregular texture mimics the natural appearance of scattered river stones, creating visual depth with a calm, understated elegance.
- Soft, earthy tones complement timber, stone, concrete and other natural materials.
- Ideal for luxury wellness retreats, boutique hotels, day spas, healthcare facilities and commercial buildings.
- Designed to create an entrance that feels intentional, inviting and connected to nature.

Natural Beauty with Commercial Performance.

- Captures up to three times more moisture during initial foot contact than conventional entrance matting.
- Helps reduce the transfer of water throughout the building, contributing to cleaner and safer interior spaces.
- Manufactured using regenerated ECONYL® nylon yarn, made from recovered waste materials including discarded fishing nets and post-consumer nylon.
- Combines sustainability, durability and commercial performance without compromising on aesthetics.

BIRRUS

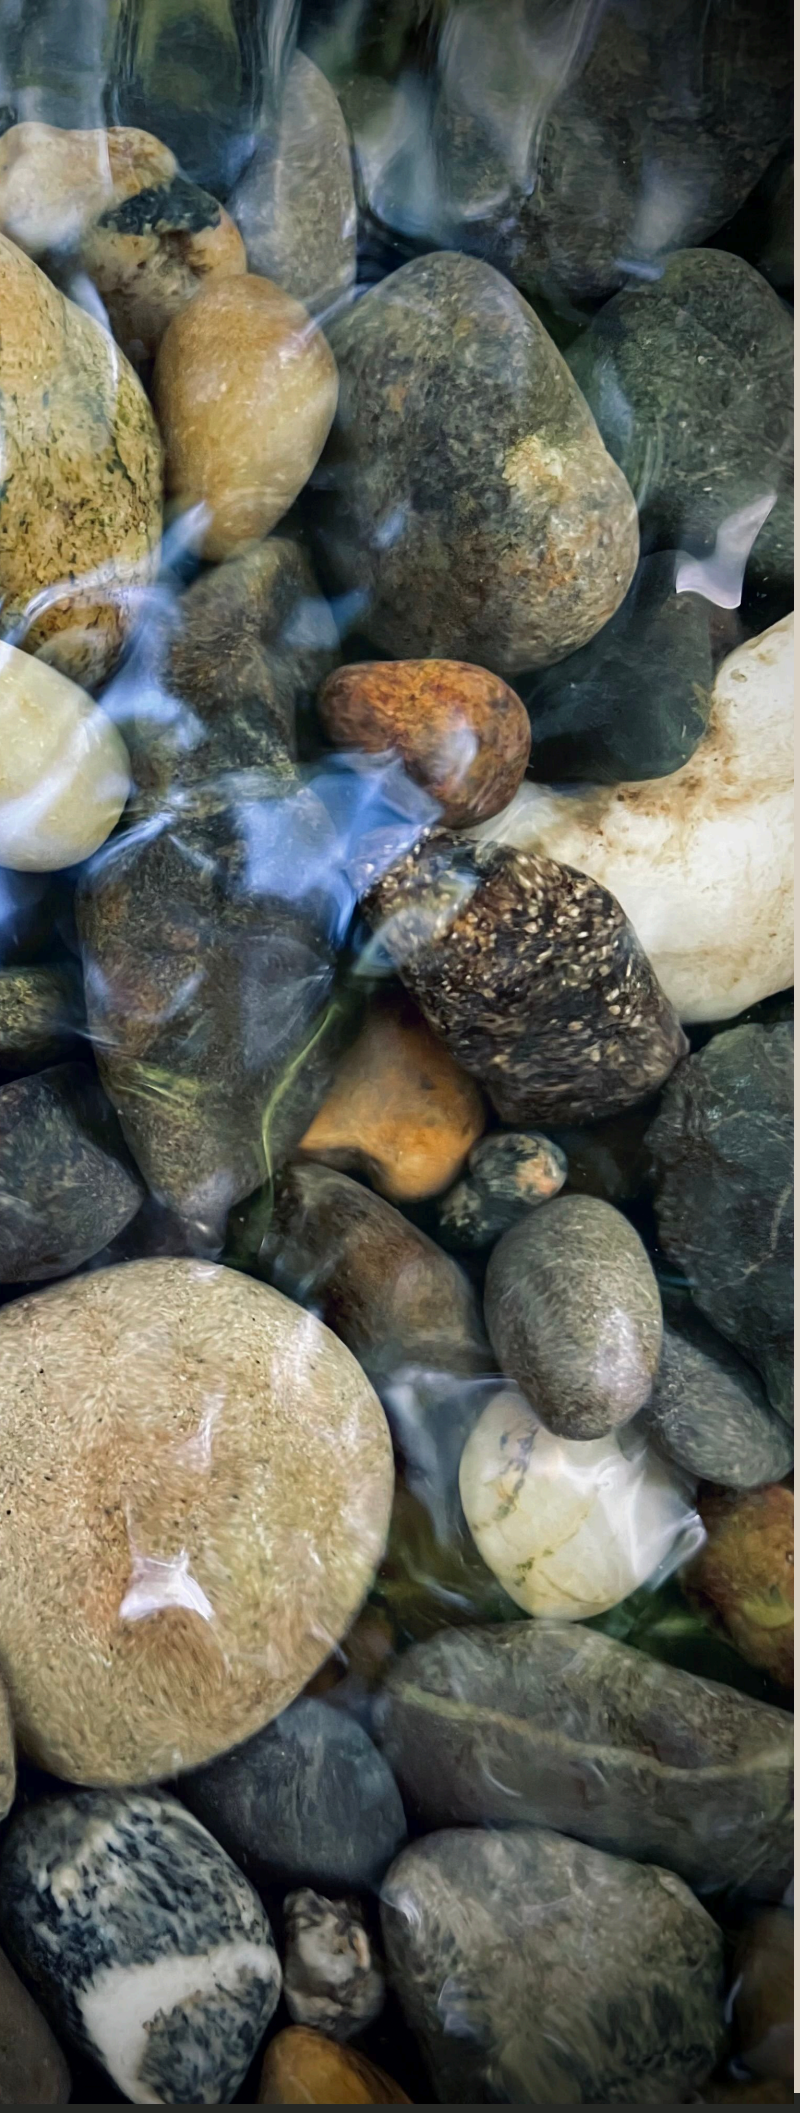

TECHNICAL SPECIFICATION

GENERAL

- 5-year warranty (excluding wear & tear)
- Indoor commercial entrance matting
- High-traffic performance
- Regenerated ECONYL® nylon yarn
- Textured loop-pile construction
- HydroTX™ moisture management technology
- Exceptional dirt concealment
- Four nature-inspired colourways
- Colouring: piece-dyed
- Recessed or surface-mounted installation
- Australian fire and slip tested

PERFORMANCE

- Moisture absorption capacity (TNO W6034): approx. 5.6 L/m²
- Sand absorption: Class 3 — ≥90%
- Slip resistant to Australian Standards
- Fire tested to Australian Standards

ROLL SIZE & THICKNESS

- Matting depth 7-8 mm
- Roll size 2.00 m × approx. 20 lm

All rolls are supplied with a 15 mm PVC edge.Supplied roll length may vary by up to ±15%





BIRRUS